
KOOL IP55| Βιομηχανικές αεροκουρτίνες και αεροκουρτίνες με ψυκτική αποθήκη

Χαρακτηριστικά

Αεροκουρτίνα ειδικά σε εφαρμογές με υπερβολικό κρύο ή/και υγρασία ή/και συνθήκες διάβρωσης.Το KOOL είναι μια συμπαγής και μικρή διάσταση αεροκουρτίνα με διαχρονικό σχεδιασμό και ευχάριστο στο μάτι.Χάρη στον σχεδιασμό εκκένωσης αέρα, η κουρτίνα αέρα KOOL εξασφαλίζει χαμηλό στροβιλισμό και πίδακα αέρα υψηλής ταχύτητας, διαχωρίζοντας έτσι αποτελεσματικά τους χώρους με υψηλές θερμοκρασίες.

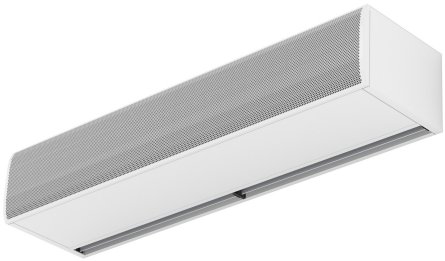


- Specially recommended in applications with extrem cold and/or humidity and/or corrosion conditions.
- Self-supporting casing construction made of galvanized steel plate, finished in structural epoxy-polyester painting white colour RAL9016 as standard. Other colours or stainless steel are available on request.
- Large faceted inlet grille avoiding intensive maintenance. Also available with flat micro-perforated inlet grille, more elegant for commercial doors where heating is not needed.
- Anodized aluminium outlet vanes, airfoil shaped, adjustable from 0 to 15º each side.
- Double-inlet centrifugal fans driven by an external rotor motor and low noise level with special IP55 protection made by: sealed bearings, encapsulate stator and wire sealed with silicone. 5-speed selector.
- Includes IP55 waterproof case for electronic components and transformer and all wire connections, including IP68 press releases.
- IMPORTANT: The electronic and transformer waterproof case cannot be assembled inside the air curtain. The customer should look for a place outside the air curtain. The dimensions of this case are 170x225x150mm.
- Includes Plug&Play control with 7m RJ45 cable and infrared remote control. Optional: Clever control (programmable, automatic, intelligent, energy saving, Modbus RTU for BMS…)


Προδιαγραφές

50Hz

Μοντέλο	(m^3/h)	(m)
KM 1000 A IP55	2,5-3,5	
KM 1500 A IP55	2,5-3,5	
KM 2000 A IP55	2,5-3,5	
KM 2500 A IP55	2,5-3,5	
KM 3000 A IP55	2,5-3,5	
KG 1000 A IP55	3-4	
KG 1500 A IP55	3-4	
KG 2000 A IP55	3-4	
KG 2500 A IP55	3-4	
KG 3000 A IP55	3-4	

Διαστάσεις



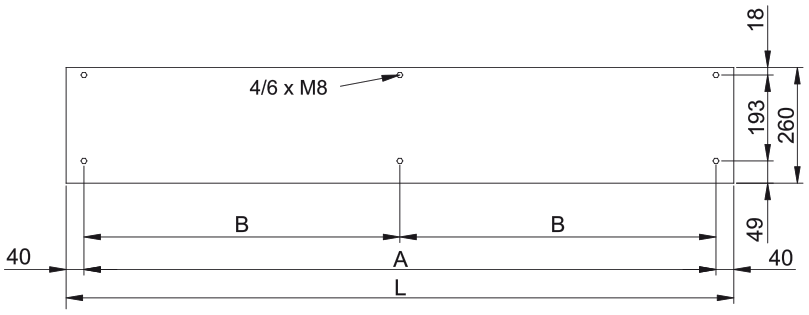

L	A	B
1000	920	-
1500	1420	710
2000	1920	960
2500	2420	1210
3000	2920	1460

